




# MacBook Air 11" Mid 2012 Trackpad Replacement

Installing the Trackpad in the mid 2012 MacBook Air 11".

Written By: Andrew Optimus Goldberg

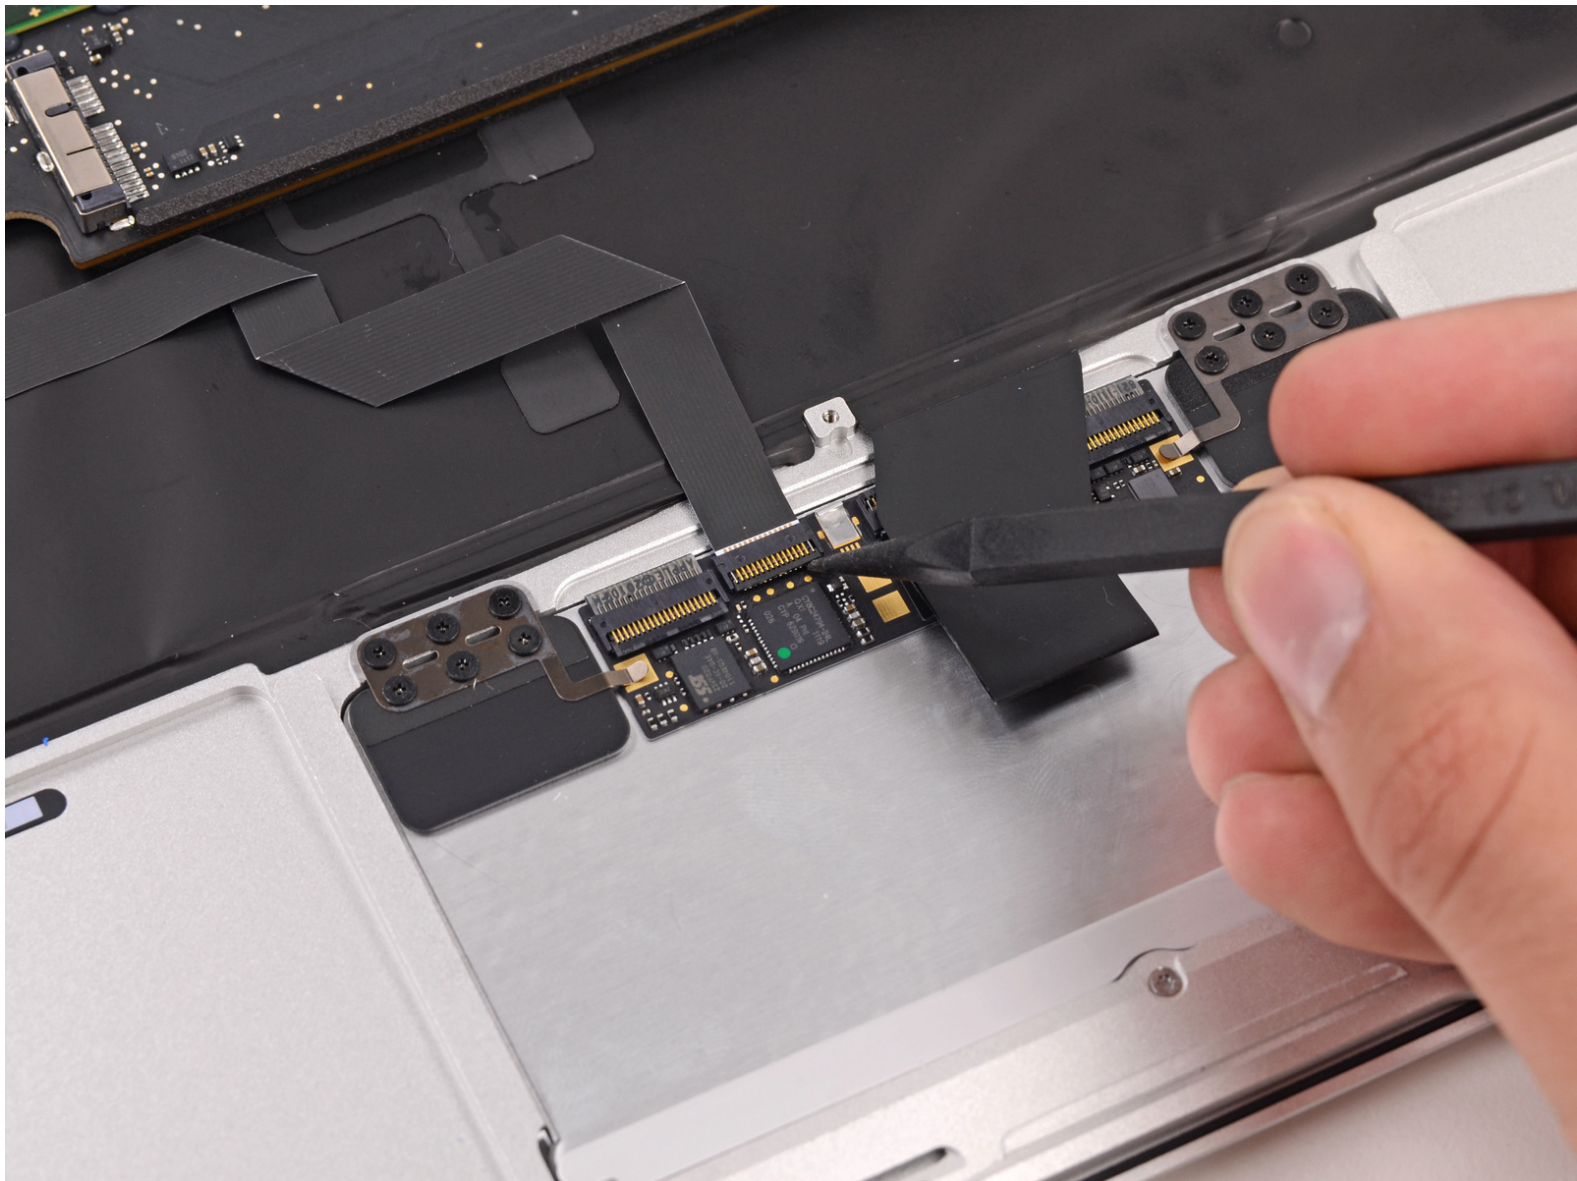

## INTRODUCTION

Navigating through your computer using the TAB key is not fun. Replace a broken trackpad using this guide.




### TOOLS:

- [P5 Pentalobe Screwdriver Retina MacBook Pro and Air](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)




### PARTS:

- [MacBook Air 11" \(Mid 2011/Mid 2012\) Trackpad](#) (1)
- [MacBook Air Trackpad Brackets and Screws](#) (1)

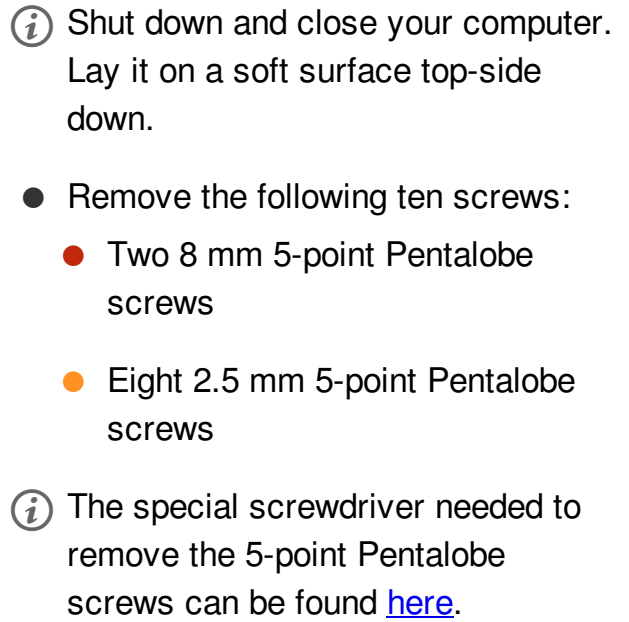


## Step 2

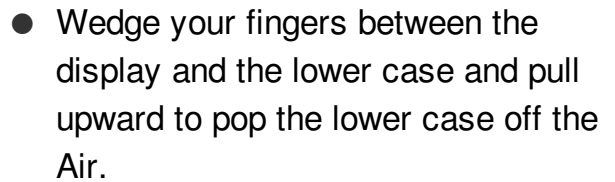




## Step 3 — Battery

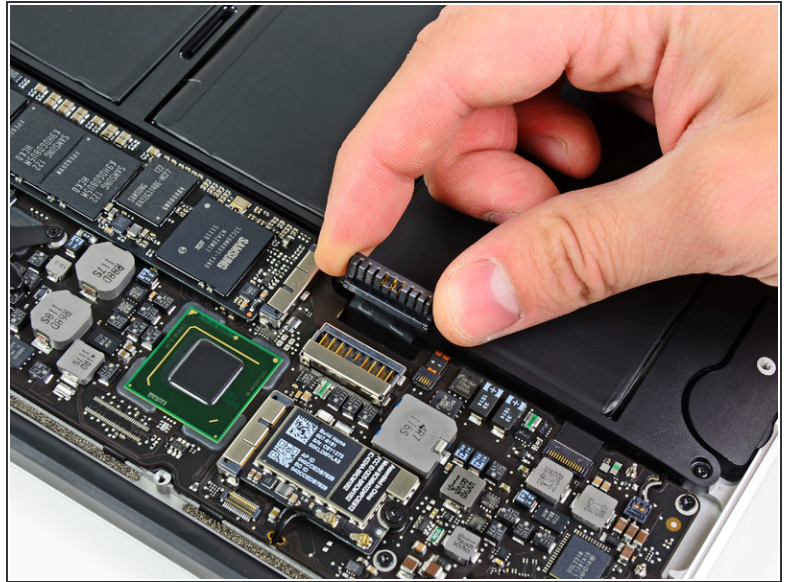

- Use the flat end of a spudger to pry both short sides of the battery connector upward to disconnect it from its socket on the logic board.
- Bend the battery cable slightly away from the logic board so the connector will not accidentally contact its socket.

## Step 4

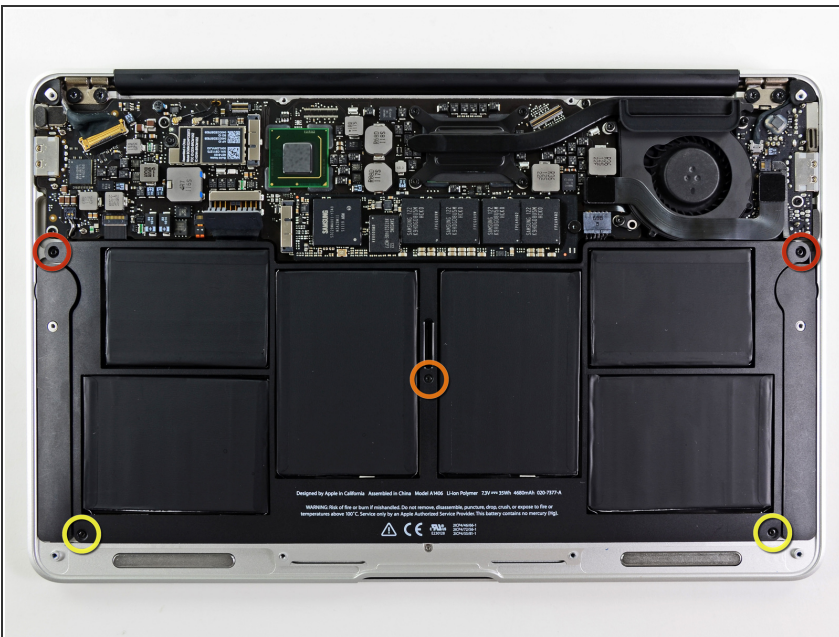

- Remove the following five screws securing the battery to the upper case:
  - Two 5.2 mm T5 Torx screws
  - One 6 mm T5 Torx screw
  - Two 2.6 mm T5 Torx screws


## Step 5



**⚠** When handling the battery, avoid squeezing or touching the six exposed lithium polymer cells.

- Lift the battery from its edge nearest the logic board and remove it from the upper case.


## Step 6 — Trackpad

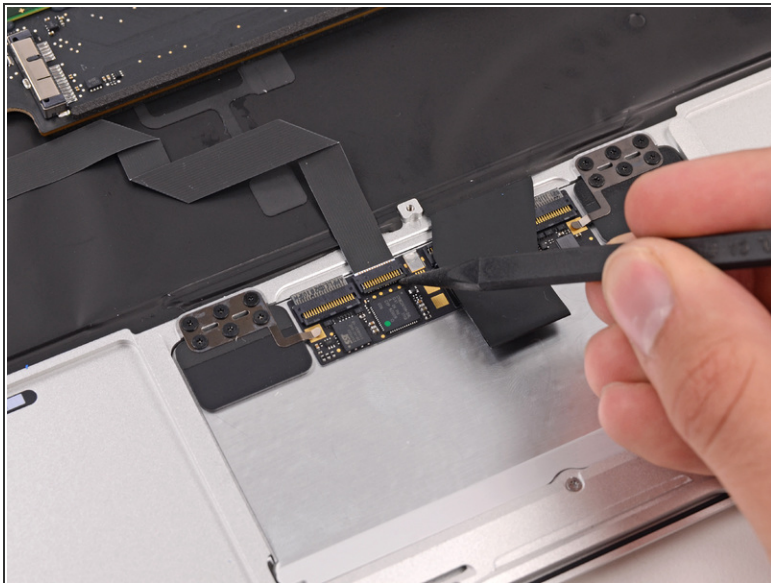

- Use the point of a spudger to lift the ZIF connector retaining flap on the trackpad data cable.
- Gently slide the ribbon cable out of the ZIF connector.
- Adjust, but do not remove the T5 Trackpad Sensitivity Screw to change the trackpad's depth sensitivity.



## Step 7

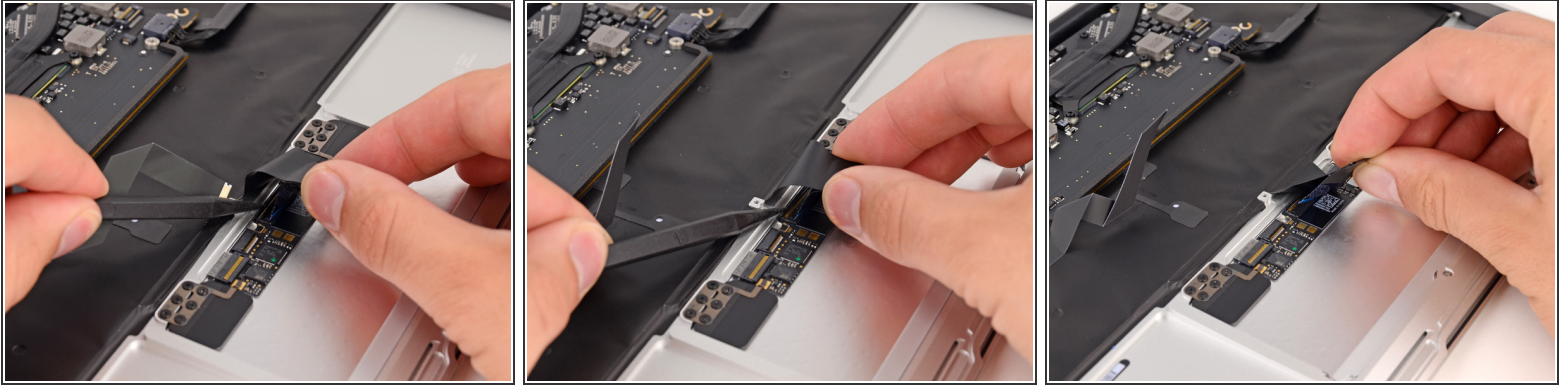


- With one hand, push the keyboard ribbon cable in slightly to access the ZIF connector beneath it.
- Use a spudger to flip up the retaining flap.
- Gently slide the cable out of the connector.

## Step 8



- Remove the six 1.5 mm Phillips #00 screws holding the trackpad in place.

## Step 9

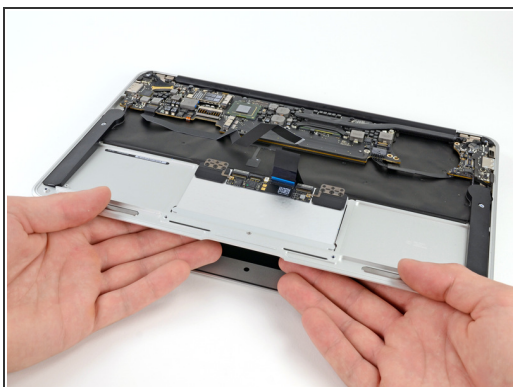

- Open the device about 10 degrees.
- While holding the bottom of the trackpad, press up on the side of the trackpad closest to the logic board to free it from the upper case.
- Remove the trackpad from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:53:45 PM.